

# Specifications

MODEL	GS™-3384 RT	
MEASUREMENTS	Metric	US
Working height maximum*	12.1 m	39 ft
<b>A</b> Platform height maximum	10.1 m	33 ft
<b>B</b> Platform length - standard	3.89 m	12 ft 8 in
outside extended - single deck	5.4 m	212.5 in
outside extended - dual deck	6.57 m	258.5 in
outside extended - super deck	7.38 m	24 ft 2.5 in
<b>C</b> Slide-out platform extension deck - front	1.52 m	5 ft
<b>D</b> Slide-out platform extension deck - rear	1.22 m	4 ft
<b>E</b> Platform width - outside	1.83 m	72 in
Platform height - stowed	1.55 m	61 in
<b>F</b> Height - stowed: folding guardrails	2.68 m	105.5 in
rails lowered	2 m	78.75 in
<b>G</b> Length - stowed: single deck	5.40 m	212.5 in
dual deck	6.57 m	258.5 in
with outriggers	4.55 m	179 in
<b>H</b> Width	2.13 m	84 in
<b>I</b> Wheelbase	2.88 m	113.5 in
<b>J</b> Ground clearance - centre	33 cm	13 in


PRODUCTIVITY		
Lift capacity	1,134 kg	2,500 lbs
Lift capacity - extension deck	227 kg	500 lbs
Drive speed - stowed	6.4 km/h	4.0 mph
Drive speed - raised	1.1 km/h	0.7 mph
Gradeability - stowed	50%	50%
Maximum outrigger levelling: front to back	7°	7°
side to side	12°	12°
Turning radius - inside	3.09 m	121.5 in
Turning radius - outside	5.94 m	234 in
Raise/lower speed	45/29 sec	45/29 sec
Controls	proportional	proportional
Drive	four wheel	four wheel
Tyres - rough terrain	25.4 x 41.9 cm	10 x 16.5 in

POWER		
Power source	Deutz Diesel F3L 2011 36 kw (49 hp), air cooled	
Auxiliary power unit	12 V DC	12 V DC
Fuel tank capacity	75.7 L	20 gal
Hydraulic tank capacity	75.7 L	20 gal

WEIGHT**		
	6243 kg	13,764 lbs

STANDARDS COMPLIANCE	
	ANSI/SIA A92.6
	AS 1418.10
	CE compliance option
	CSA CAN3-B354.2-M82

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
\*\* Weight will vary depending on options and/or country standards.

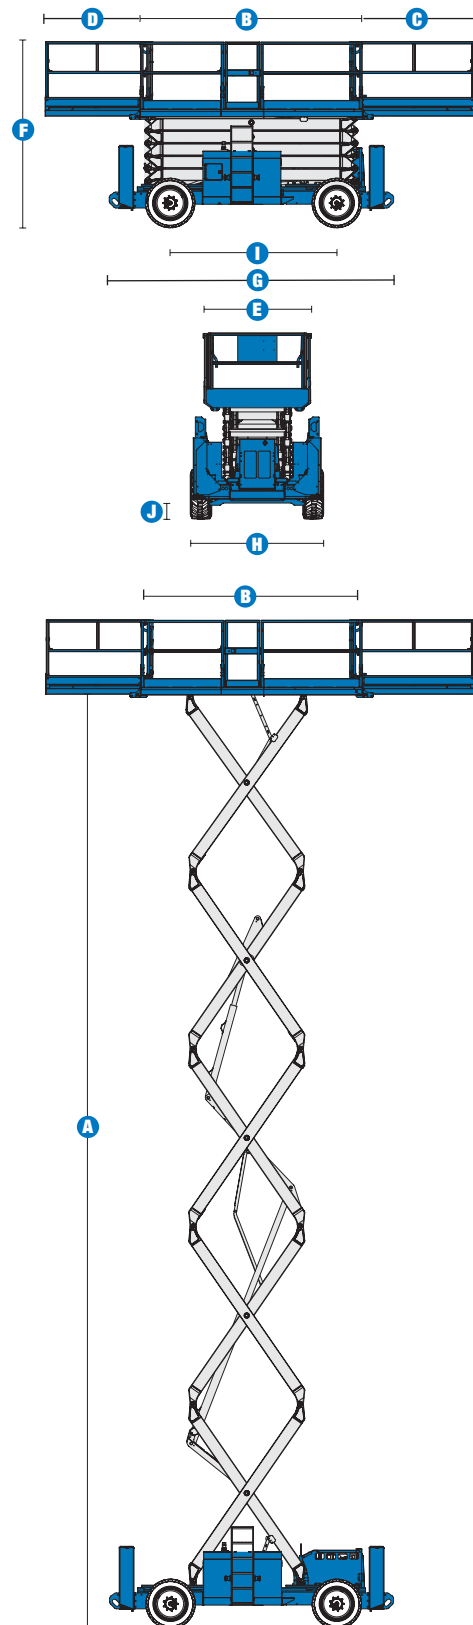

## Features

### STANDARD FEATURES

#### MEASUREMENTS


- 12.1 m (39 ft) working height
- 1,134 kg (2,500 lb) platform capacity

#### PRODUCTIVITY

- Steel 5.34 m (17 ft 6.25 in) platform
- Diamond plate deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full-height swing gate
- Two self-closing gates
- 4x4
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Tilt level sensor with audible alarm
- Descent alarm
- Electric horn
- Hour meter
- Motion alarms
- Dual flashing beacons
- Automatic leveling hydraulic outriggers
- Deutz diesel F3L 2011 36 kW (49 hp)
- Dual slide-out platform extension deck package 1.52 m (60 in) front and 1.22 m (48 in) rear

#### TYRES

- Foam filled tyres (rough terrain)

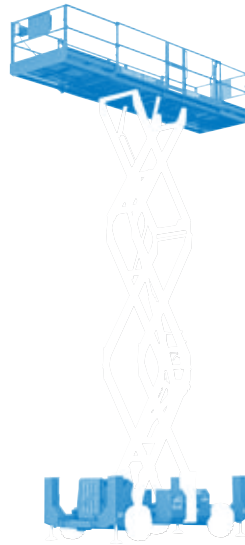

### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- 7.38 m (24 ft 2.5 in) super deck extension package
- Air line to platform
- Platform work lights
- Hydraulic oil cooler
- 5,000 watt generator (240 Volt/50 hz)
- Cold start packages for all engines
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- Non-marking foam tyres

### Genie Australia

591 Boundary Road, Darra, Qld 4076  
PO Box 394, Richlands, Qld 4077  
Tel: + 61 7 3375 1660  
Toll Free In Australia: 1800 331 660  
Fax: + 61 7 3375 1002

### European Offices

#### UK

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

#### France

10, ZA de la Croix St. Mathieu  
28320 Gallardon  
France  
Tel: +33 (0)2 37 26 09 99  
Fax: +33 (0)2 37 26 09 98

#### Germany

Finienweg 3  
28832 Achim/Bremen  
Germany  
Tel: +49 (0)4202 8852-0  
Fax: +49 (0)4202 8852-25

#### Spain

Gai`a 31, Pol. Ind. Pl`a d'en Coll  
08110 Montcada i Reixac  
Barcelona  
Spain  
Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

#### Scandinavia

Tagenevägen 72  
425 37 Hisings Kärra  
Sweden  
Tel: +46 31 57 51 00  
Fax: +46 31 57 90 20

### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730  
USA  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

**WEB:** [www.genieindustries.com](http://www.genieindustries.com)

### Distributed By: