

MHP13/35

TRAILER MOUNTED BOOM LIFT



- Safe and stable working height of up to 12.6m
- Heavy duty trailer mounted articulated boom lift
- Robust steel platform with two man capacity
- Easy to use outrigger/boom safety interlocks
- Ideal for a wide range of construction, building and maintenance applications

 **snorkel**
www.snorkellifts.com

TRAILER MOUNTED BOOM LIFTS MHP13/35



DIMENSIONS	MPH13/35
Max. working height	12.6m
Max. platform height (A)	10.6m
Horizontal outreach	5.6m at 6m
Platform size	1.25m x 0.78m x 1.07m
Outrigger footprint	3.7m x 3.9m
Overall width (outriggers extended)	3.95m
Overall width (outriggers retracted) (B)	1.58m
Overall length (C)	5.99m
Transport height (D)	2.05m

PERFORMANCE	
Platform capacity	227kg
Max. wind speed	12.5m/sec
Max. towing speed	80km/h
Platform Levelling	Mechanical
Turntable rotation	540° non-continuous
Tyres	185 R14
Brakes	Hydraulic disc
Max. axle capacity	1,750kg
Trailer tongue weight	65kg

POWER	
Power source	Honda petrol engine 5.5hp
Hydraulic system	Proportional electro/hydraulic

WEIGHT	
Gross weight	1,360kg

WORKING ENVELOPE

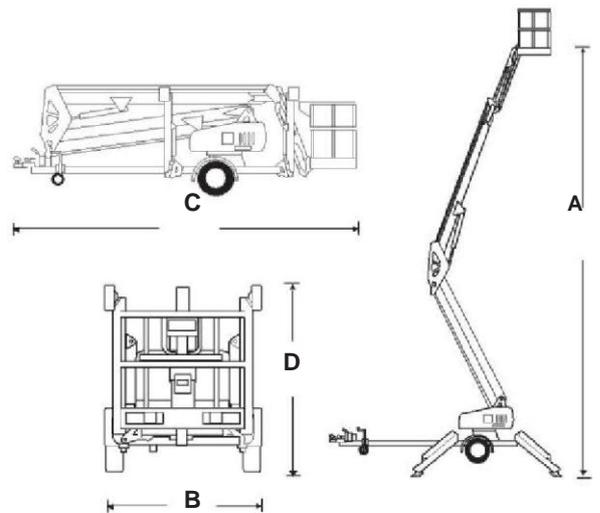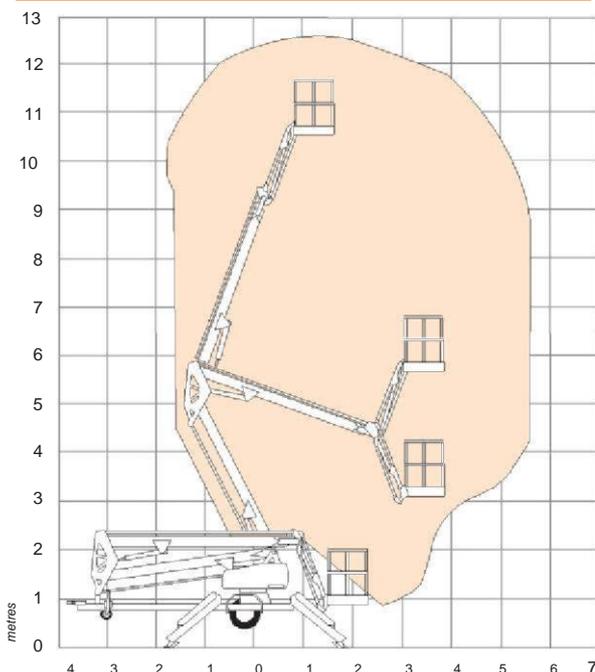

STANDARD FEATURES

- High strength steel boom and base construction
- Proportional speed control
- Heavy duty tow coupling
- Heavy duty jockey wheel
- Hydraulic disc brakes
- Reliable petrol engine
- Versatile jib boom (+70° to -70°)
- Articulating boom sections for 'up & over' reach
- Two man steel platform
- Automatic self levelling stabilisers
- Outrigger/boom safety interlocks
- Lockable hinged covers
- Hour meter
- Lifting lugs
- Hydraulic platform rotator

OPTIONS

- 360° continuous rotation turntable
- Flashing light
- 110/240V AC GFCI power to platform
- Diesel, electric and Bi-energy options

snorkel

2/26 Redfern Street,
Wetherill Park, NSW
2164, Australia
t: +61 1300 900 700
e: sales.au@snorkellifts.com

www.snorkellifts.com

[PDF to Word](#)