

S3970RT

ROUGH TERRAIN SCISSOR LIFT



- Diesel-powered rough terrain scissor lift
- Large work area with 1.2m roll-out deck extension
- Automatic self-levelling stabilisers
- Powerful 4x4 drive
- Ideal for construction applications

snorkel
www.snorkellifts.com

ROUGH TERRAIN SCISSOR LIFT

S3970RT



DIMENSIONS	S3970RT
Max. working height	13.5m
Max. platform height (A)	11.5m
Platform size (stowed) (B)	2.73m x 1.65m
Platform size (extended) (C)	3.93m x 1.65m
Deck extension (D)	1.2m
Overall width (E)	1.8m
Overall length (F)	3.32m
Stowed height (G)	2.95m
Min. height (guardrails folded)	2.15m
Ground clearance	350mm

PERFORMANCE	
Platform capacity (SWL)	350kg
Max. drive height	11.5m
Max. drive speed (stowed)	4.5km/h
Max. drive speed (elevated)	0.35km/h
Raise/lower time	48/54 sec
Gradeability	30%
Max. outrigger levelling, front to rear	7°
Max. outrigger levelling, side to side	11°
Inside turning radius	2.38m
Outside turning radius	4.75m
Tyres	27 x 10.5 x 15 poly-filled loader lug
Controls	proportional joystick
Drive system	4 wheel drive

POWER	
Power source	Kubota diesel engine
Power options	Gasoline, LPG, Combination (LPG/Gasoline), Bi-Energy 24V DC

WEIGHT	
Gross weight	3,790kg

TURNING RADIUS

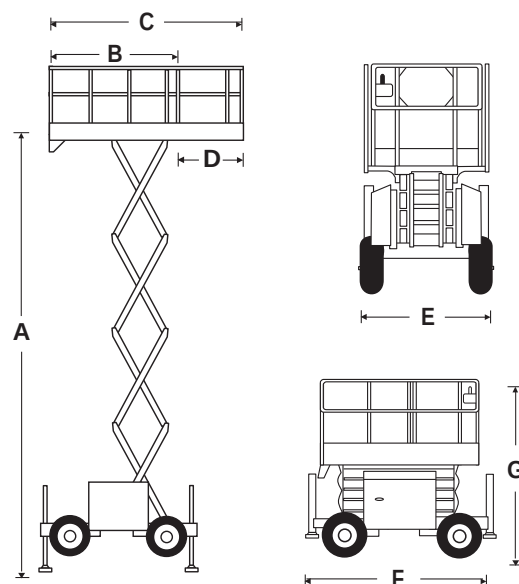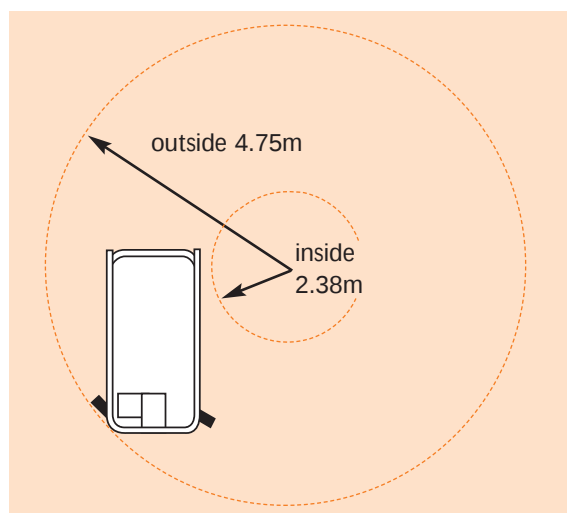

STANDARD FEATURES

- Proportional joystick controls
- 1.2m roll-out deck extension
- Diesel engine
- 4 wheel drive
- Driveable at full height
- Hour meter
- Automatic self-levelling stabilisers
- Independent articulating rear axle
- Forklift pockets
- Lifting lugs and tie down rings
- Flashing amber light

OPTIONS

- No stabilisers
- Non-marking tyres
- 110/240V power to platform
- RCD/ELCB outlet

snorkel

2/26 Redfern Street,
Wetherill Park,
NSW 2164, Australia
t: +61 1300 900 700
e: sales.au@snorkellifts.com

www.snorkellifts.com